



S77FR is a hinged insulated system that offers fire resistance to EI30 classification.


The system is based on profiles and accessories of S77 combined with appropriate fireproof components and fireproof glass.

S77FR can be either used for internal or external use and provides all advantages of a high end casement system accompanied with the attributes of a fire resistant system.

Product characteristics

- Basic system depth 77 mm.
- High thermal insulation thanks to 30 mm width polyamides.
- Use of S77 profiles.
- Visible frame/sash sightline 103 mm.
- Max dimensions 2200 x 2200 mm.
- Can be combined with curtain wall M50 FR.

1. Fireproof glass
2. Fireproof setting block
3. Intumescent tape
4. Cooling material

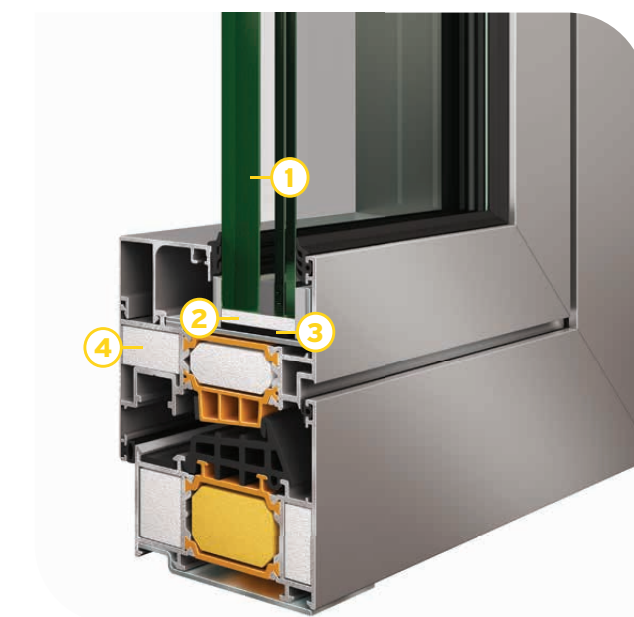

Alumil > FIRE RATED SYSTEMS

S77FR

